

CODEL ENTRY SYSTEMS™

PHONE: 800-508-1696
FAX: 253-536-9662

Company Name: _____ Location: _____
 Number: _____ PO# _____
 Customer Name: _____ Order Date: _____
 Salesperson: _____ ETA: _____

Fill-in or circle information below:

QTY: _____ **STYLE/ MODEL:** _____ **DOOR SIZE:** _____ X _____
If Craftsman Door. Shelf? Yes No For custom sizes indicate R/O or Net Unit Dimensions (NUD)

DOOR TYPE: Steel Smooth Fiberglass Textured Fiberglass Fir-Grained Fiberglass Rustic Fiberglass

SIDLITE STYLE: _____ **SIZE:** _____ **ATTACHED TO:** Bore Side Hinge Side **NET UNIT WIDTH:** _____ **Storm Door Compatible?** Yes No

JAMB WIDTH: 4-9/16" (STD) 5-1/4" 6-9/16" 7-1/4" OTHER: _____

JAMB TYPE: Primed FJ (STD) Smooth White Composite WeatherGuard* Textured Tan Composite WeatherGuard* Hemlock

*WeatherGuard Jambes Required for Codel Coatings


SILL: **INSWING** **OUTSWING**

WaterShed Mill Bronze **Aluminum Bumper** Mill Bronze
Adjustable Mill Bronze **Oak Bumper** Mill Bronze
Fixed Mill Bronze **Low Pro** Mill Bronze
Low Pro Mill Bronze

HINGES: **BRASS** **BRONZE** **CHROME** **NICKEL** Nonferrous
 US3-4 (STD) Bright Brass US10B Bronze US26 Bright Chrome US15 Satin Nickel
 US5 Antique Brass US26D Brushed Chrome US15A Antique Nickel **OTHER:** _____

BORE: Single Double (STD) No Bore **BORE BACKSET:** 2-3/8" (STD) 2-3/4"

DOOR EDGE PREP: Drive-In (STD) Mortise **JAMB STRIKE PREP:** Standard (1 X 2-1/4) Schlage (1-1/8 X 2-3/4) Kwikset (1-1/4 X 3-5/8) Other: _____

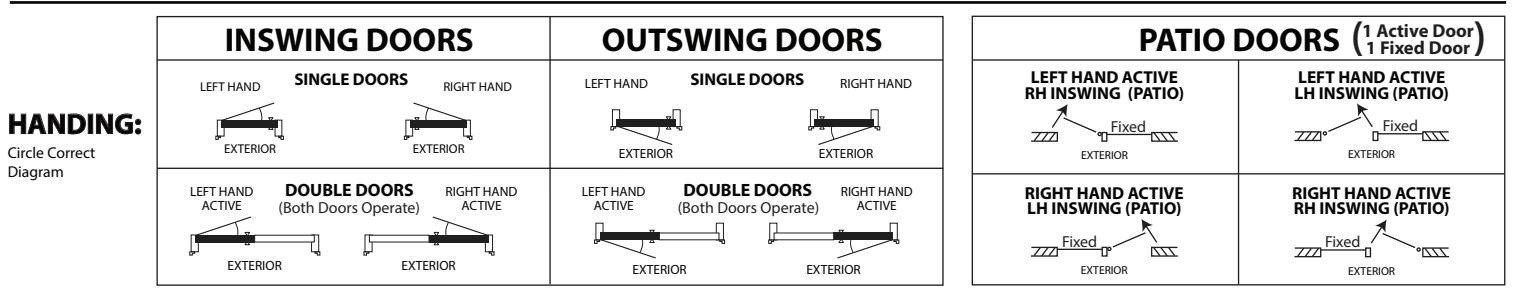

TRANSOM STYLE: _____ **NET UNIT HEIGHT:** (Door w/ Transom) _____ **Storm Door Compatible?** Yes No

CODEL COATING: **DOOR SLAB:** Interior Color: _____ Exterior Color: _____ **JAMB & BRICKMOULD:** Interior Color: _____ Exterior Color: _____

DOORGUARD PACKAGE: Yes No **MISC. OPTION:** _____

SPECIAL NOTES: _____ **TOTAL \$** _____